

CALACATTA VAGLI



DATA SHEET

- ULTIMATE TENSILE STRENGTH [UTS] TO PRESSURE	kg/cm ²	99,2
- ULTIMATE TENSILE STRENGTH [UTS] AFTER FREEZING CYCLES	kg/cm ²	1820
- ULTIMATE TENSILE STRENGTH [UTS] TO BENDING STRESS	kg/cm ²	13,9
- THERMIC LINEAR DILATATION	mm/m°C	33
- WATER ABSORPTION COEFFICIENT	%	0,14
- IMPACT STRENGTH	cm	0,4
- ABRASION STRENGTH	mm	69
- WEIGHT PER UNIT VOLUME	KG/m ³	2710


SHOW ROOM

Via Covetta, 1
54033 Avenza, Carrara

HEADQUARTER

Via Covetta, 2
54030 Carrara (MS) Italy

Tel +39 0585 858494 / Fax +39 0585 52027 / E-mail: furrer@furrer.it

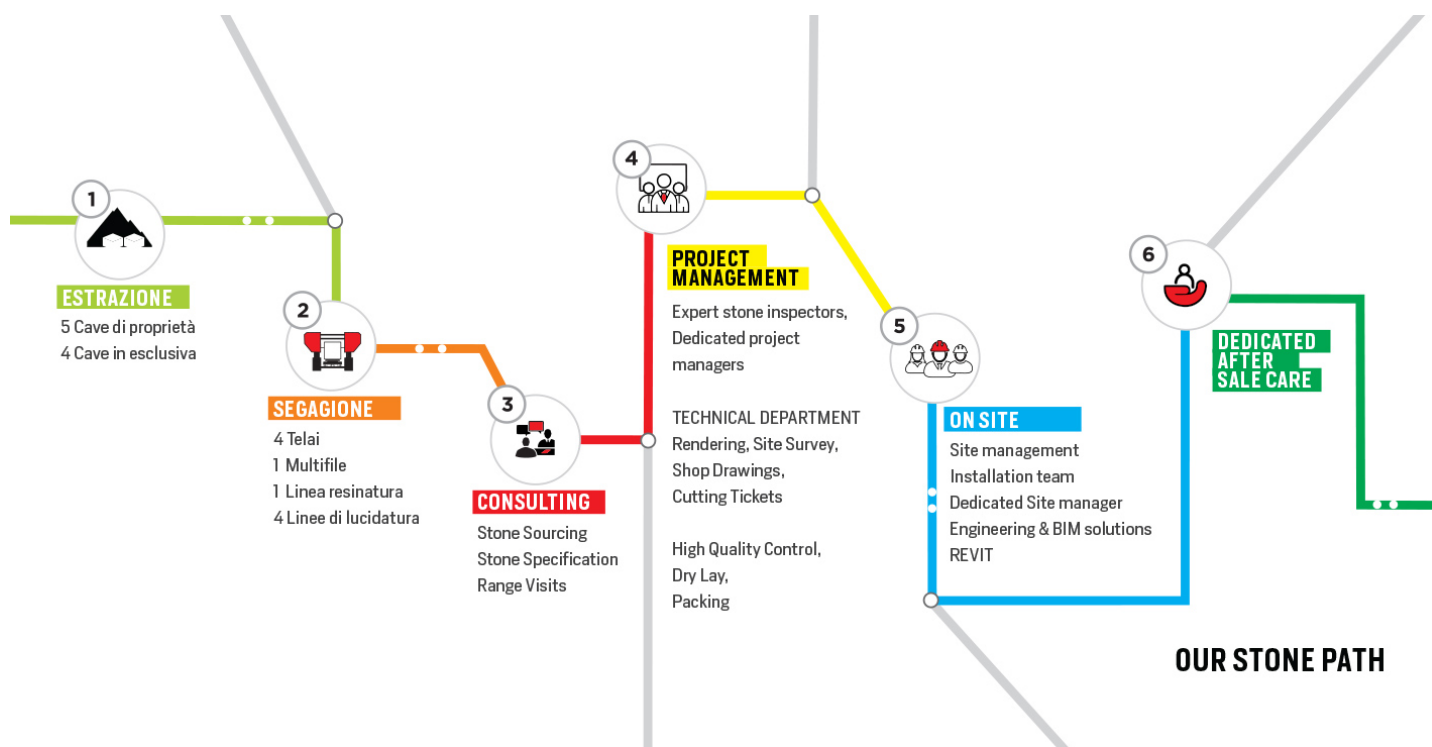

SHOW ROOM
Via Covetta, 1
54033 Avenza, Carrara

HEADQUARTER
Via Covetta, 2
54030 Carrara (MS) Italy

Tel +39 0585 858494 / Fax +39 0585 52027 / E-mail: furrer@furrer.it